

## CORE SETS

## Effective core parameters

SYMBOL	PARAMETER	VALUE	UNIT
$\Sigma(I/A)$	core factor (C1)	0.330	mm <sup>-1</sup>
$V_e$	effective volume	6190	mm <sup>3</sup>
$l_e$	effective length	45.2	mm
$A_e$	effective area	137	mm <sup>2</sup>
$A_{\min}$	minimum area	116	mm <sup>2</sup>
$m$	mass of set	$\approx 34$	g

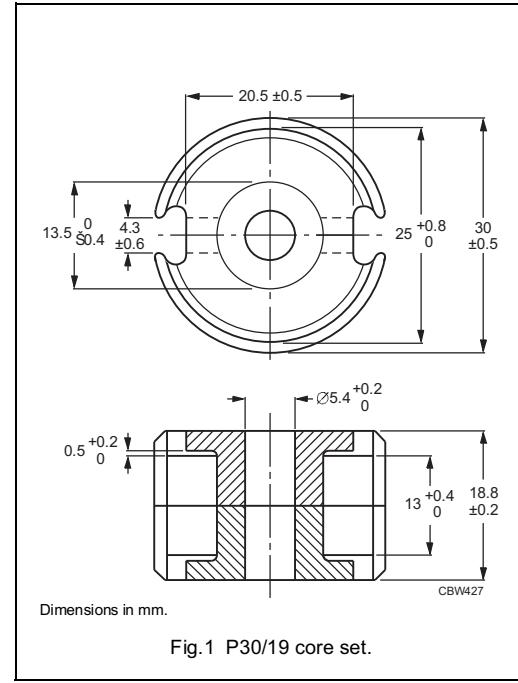


Fig.1 P30/19 core set.

Core sets for general purpose transformers and power applications

Clamping force for  $A_L$  measurements, 250 ±50 N.

GRADE	$A_L$ (nH)	$\mu_e$	TOTAL AIR GAP ( $\mu m$ )	TYPE NUMBER
3C81	250 ±3%	≈ 66	≈ 840	P30/19-3C81-E250
	315 ±3%	≈ 83	≈ 640	P30/19-3C81-A315
	400 ±3%	≈ 105	≈ 480	P30/19-3C81-A400
	630 ±3%	≈ 165	≈ 290	P30/19-3C81-A630
	1000 ±3%	≈ 263	≈ 170	P30/19-3C81-A1000
	8300 ±25%	≈ 2180	≈ 0	P30/19-3C81
3C91 des	8300 ±25%	≈ 2180	≈ 0	P30/19-3C91
3F3	250 ±3%	≈ 66	≈ 840	P30/19-3F3-E250
	315 ±3%	≈ 83	≈ 640	P30/19-3F3-A315
	400 ±3%	≈ 105	≈ 480	P30/19-3F3-A400
	630 ±3%	≈ 165	≈ 290	P30/19-3F3-A630
	1000 ±3%	≈ 263	≈ 170	P30/19-3F3-A1000
	5750 ±25%	≈ 1510	≈ 0	P30/19-3F3

Core sets of high permeability grades  
Clamping force for  $A_L$  measurements,  $250 \pm 50$  N.

GRADE	$A_L$ (nH)	$\mu_e$	AIR GAP ( $\mu\text{m}$ )	TYPE NUMBER
3E27	$15100 \pm 25\%$	$\approx 3960$	$\approx 0$	P30/19-3E27

Properties of core sets under power conditions

GRADE	B (mT) at	CORE LOSS (W) at			
		$f = 25$ kHz; $\hat{B} = 200$ mT; $T = 100$ °C	$f = 100$ kHz; $\hat{B} = 100$ mT; $T = 100$ °C	$f = 100$ kHz; $\hat{B} = 200$ mT; $T = 100$ °C	$f = 400$ kHz; $\hat{B} = 50$ mT; $T = 100$ °C
3C81	$\geq 320$	$\leq 1.43$	$\checkmark$	$\checkmark$	$\checkmark$
3C91	$\geq 315$	–	$\leq 0.37^{(1)}$	$\leq 2.6^{(1)}$	$\checkmark$
3F3	$\geq 315$	–	$\leq 0.7$	–	$\leq 1.2$


#### Note

1. Measured at 60 °C.

## COIL FORMERS

General data CP-P30/19 coil former

PARAMETER	SPECIFICATION
Coil former material	polybutyleneterephthalate (PBT), glass reinforced, flame retardant in accordance with "UL 94V-0"; UL file number E45329 (R)
Maximum operating temperature	155 °C, "IEC 60 085", class F

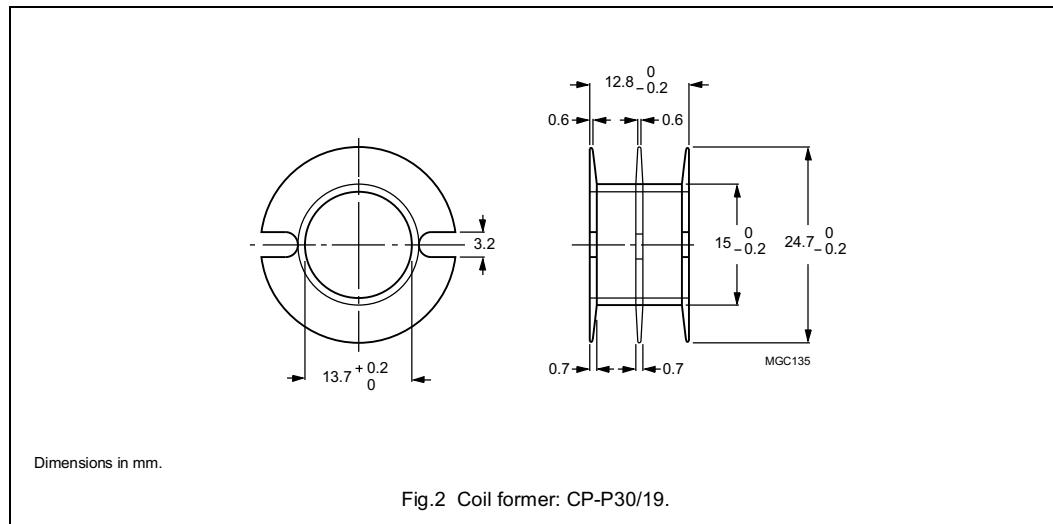


Winding data and area product for P30/19 coil former

NUMBER OF SECTIONS	MINIMUM WINDING AREA (mm <sup>2</sup> )	NOMINAL WINDING WIDTH (mm)	AVERAGE LENGTH OF TURN (mm)	AREA PRODUCT Ae x Aw (mm <sup>4</sup> )	TYPE NUMBER
1	53.2	11.1	62	7290	CP-P30/19-1S
2	2 × 24.9	2 × 5.15	62	2 × 3410	CP-P30/19-2S
3	3 × 15.5	3 × 3.2	62	3 × 2120	CP-P30/19-3S

General data 6-pins P30/19 coil former for PCB mounting

PARAMETER	SPECIFICATION
Coil former material	polyamide (PA6.6), glass reinforced, flame retardant in accordance with "UL 94-HB"; UL file number E41938(M)
Maximum operating temperature	130 °C, "IEC 60085", class B
Pin material	copper-zinc alloy (CuZn), tin (Sn) plated
Resistance to soldering heat	"IEC 60068-2-20", Part 1, Test Tb, method 1B, 350 °C, 3.5 s. For connection of wire to pins: 430 °C, 2 seconds
Solderability	"IEC 60068-2-20", Part 2, Test Ta, method 1, 235 °C, 2 s

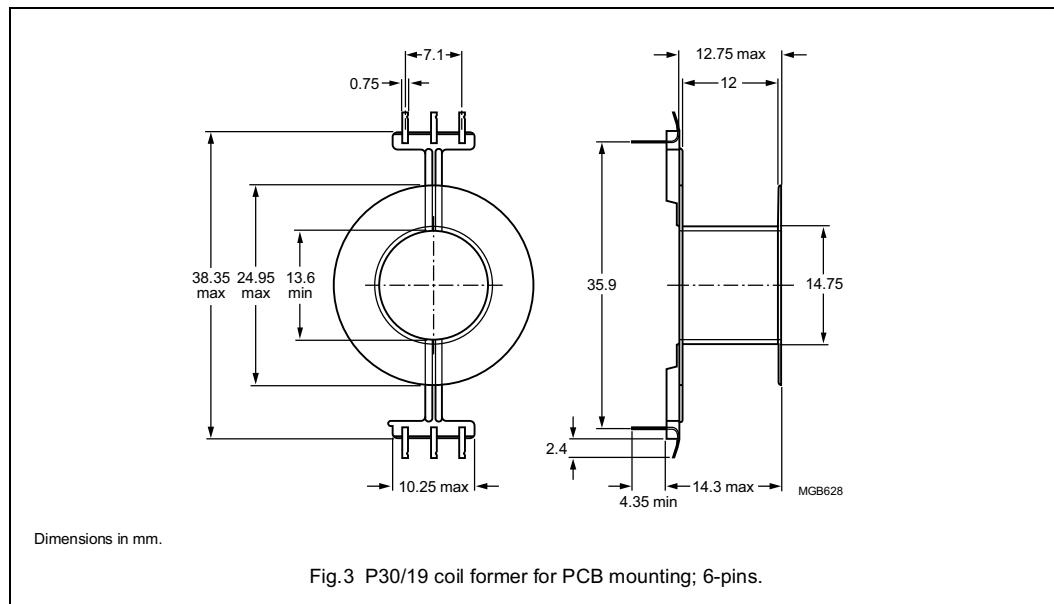

Winding data and area product for 6-pins P30/19 coil former for PCB mounting

NUMBER OF SECTIONS	MINIMUM WINDING AREA (mm <sup>2</sup> )	NOMINAL WINDING WIDTH (mm)	AVERAGE LENGTH OF TURN (mm)	MINIMUM LENGTH OF PINS (mm)	AREA PRODUCT Ae x Aw (mm <sup>4</sup> )	TYPE NUMBER
1	55.2	12.8	62.2	4.4	7560	CPV-P30/19-1S-6PD
1	55.2	12.8	62.2	6.8	7560	CPV-P30/19-1S-6PDL

## MOUNTING PARTS

## General data and ordering information

ITEM	REMARKS	FIGURE	TYPE NUMBER
Tag plate	material: phenolformaldehyde (PF), glass reinforced flame retardant: in accordance with "UL 94V-0"; UL file number E41429 maximum operating temperature: 180 °C, "IEC 60085", class H pins: copper-tin alloy (CuSn), tin (Sn) plated resistance to soldering heat in accordance with "IEC 60068-2-20", Part 2, Test Tb, method 1B: 350 °C, 3.5 s solderability in accordance with "IEC 60068-2-20", Part 2, Test Ta, method 1: 235 °C, 2 s	4	TGP-P30/19-C
Container	copper-zinc alloy (CuZn), tin (Sn) plated earth pins: presoldered	5	CON-P30/19
Spring	CrNi-steel spring force: ≈250 N when mounted	6	SPR-P30/19
Clamp	spring steel, tin-plated	7	CLM/TS-P30/19

